


MONOFLEX

- low mechanical resistance



MAT					
PVC	-5 - +60°C	A1 - F	30 sec.	320 N/5 cm	22212

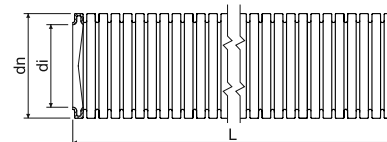

- ☑ For surface installation, into or under parget.
- ☑ Suitable for mounting into hollow walls, plaster walls and ceilings.
- ☑ It is possible to install on premises where there is danger of explosions of flammable gases and vapours (zone 2) and on premises where there is danger of explosions of flammable dust (zone 22).

item	conf.	description		dn	di min.	L		EAN		
				mm	mm	m	m		pg.	
EN	1416E	F50	-	black	16	10,7	50	5400	8595568909664	3-16 - 3-18
		H50	-	white			50	5400	8595057665842	
		K10	-	light grey			10	10	8595568924940	
		K100	-				100	7200	8595568910080	
		K50	-				50	5400	8595057616035	
		K50D	with wire				50	5400	8595057619753	
	1420	F50	-	black	20	14,1	50	4500	8595568909671	
		H50	-	white			50	4500	8595057665859	
		K10	-	light grey			10	10	8595568924957	
		K100	-				100	4000	8595568910097	
		K25	-				25	3900	8595057697461	
		K50	-				50	4500	8595057616042	
	K50D	with wire	50	4500	8595057619760					
	1425	F50	-	black	25	18,3	50	3000	8595568909695	
		H50	-	white			50	3000	8595057665866	
		K10	-	light grey			10	10	8595568927019	
		K100	-				100	3200	8595568910103	
		K25	-				25	min. 2250	8595057699298	
		K50	-				50	3000	8595057616059	
	K50D	with wire	50	3000	8595057619777					
	1432	F50	-	black	32	24,3	50	1600	8595568909718	
		H50	-	white			50	1600	8595057665873	
		K10	-	light grey			10	10	8595568927026	
		K25	-				25	1500	8595057699304	
K25D		with wire	25				1500	8595057619784		
K50		-	50				1600	8595057616066		
1440	F50	-	black	40	31,2	50	1000	8595568909725		
	H25	-	white			25	1000	8595057693579		
	K25	-	light grey			25	1000	8595057619715		
	K25D	with wire				25	1000	8595057621510		
1450	F25	-	black	50	39,6	25	min. 800	8595568909732		
	K25	-	light grey			25	800	8595057619722		
ČSN	1413/1	K100	-	light grey	18,7	13,5	100	4000	8595057600416	3-6
	1416/1	K100	-		21,2	16,0	100	3600	8595057600423	
	1423/1	K100	-		28,5	22,9	100	2800	8595057600430	
	1429/1	K50	-		34,5	28,4	50	2000	8595057600447	
	1436/1	K50	-		42,2	35,9	50	1000	8595057600454	