


LPE-2

- very low mechanical resistance



MAT PE -25 - +90°C A1 125 N/5 cm 11423

☑ Suitable for installing into prefabricated concrete elements.

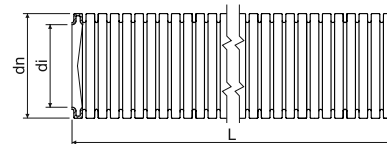

item	conf.	description		dn	di min.	L		EAN		
				mm	mm	m	m		pg.	
EN	2316E/LPE-2	A100	-	orange	16	10,7	100	7200	8595057651210	3-20 - 3-21
		A100D	with wire				100	min. 7200	8595057651227	
		F100	-				100	min. 7200	8595568910127	
		F100D	with wire				100	min. 7200	8595568910172	
	2320/LPE-2	A100	-	orange	20	14,1	100	4000	8595057651258	
		A100D	with wire				100	min. 4000	8595057651265	
		F100	-				100	min. 4000	8595568910134	
		F100D	with wire				100	min. 4000	8595568910189	
	2325/LPE-2	A100	-	orange	25	18,3	100	3200	8595057651296	
		A100D	with wire				100	3200	8595057651302	
		F100	-				100	min. 3200	8595568910141	
		F100D	with wire				100	min. 3200	8595568910196	
2332/LPE-2	A50	-	orange	32	24,3	50	1600	8595057657397		
	A50D	with wire				50	min. 1600	8595057668850		
	F50	-				50	min. 1600	8595568910158		
	F50D	with wire				50	min. 1600	8595568910202		
2340/LPE-2	A25	-	orange	40	31,2	25	1000	8595057688469		
	F25	-				25	min. 1000	8595568910165		
ČSN	2313/LPE-2	A100	-	orange	18,7	13,5	100	4000	8595057614857	3-10
		F100	-				100	min. 4000	8595568910219	
		H100	-				100	4000	8595057603646	
	2316/LPE-2	A100	-	orange	21,2	16,0	100	min. 3600	8595057614864	
		F100	-				100	min. 3600	8595568910226	
		H100	-				100	3600	8595057603653	
	2323/LPE-2	A100	-	orange	28,5	22,9	100	min. 2800	8595057614871	
		F100	-				100	min. 2800	8595568910233	
		H100	-				100	2800	8595057603660	
	2329/LPE-2	A50	-	orange	34,5	28,4	50	min. 4800	8595057614888	
		H50	-				50	2000	8595057603677	
		F50	-				50	min. 4800	8595568910240	
2336/LPE-2	H50	-	white	42,2	35,9	50	1000	8595057603684		