



LHD 40X40

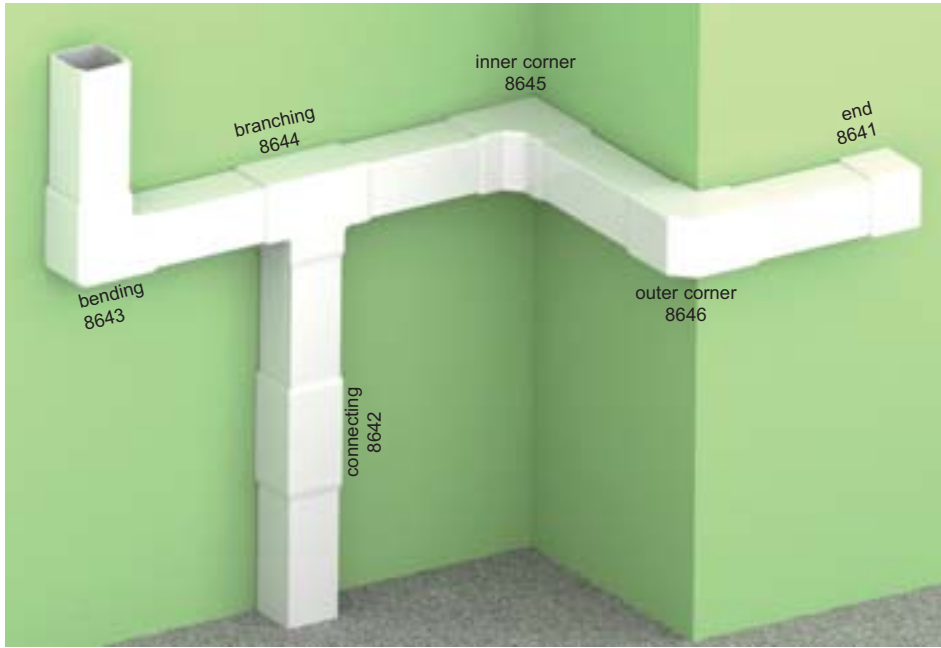

MAT
⌄
🔥
🔥
🔥
⏱
⚡
📏
Pb Free
💣
☔
IK

PVC -5 - +60°C 850°C A1 - F 30 sec. 0,5 J 1300 mm² IP 40 IK06

- ✓ Standard shape.
- ✓ Designed for wall or ceiling mounting.
- ✓ Double lock on lid increasing the trunking's rigidity and ensuring stronger cover fixation.

Accessories			
	conf.	package	EAN
8641 - end			
	HB	10	8595057611023
	I2	1	8595568905482
	SD	1	8595568905475
8642 - connecting			
	HB	10	8595057611931
	I2	1	8595568905536
	SD	1	8595568905529
8643 - bending			
	HB	10	8595057611986
	I2	1	8595568905826
	SD	1	8595568905819
8644 - branching			
	HB	10	8595057612020
	I2	1	8595568909893
	SD	1	8595568909886
8645 - inner corner			
	HB	10	8595057613157
	I2	1	8595568909978
	SD	1	8595568909985
8646 - outer corner			
	HB	10	8595057614055
	I2	1	8595568910042
	SD	1	8595568910035

conf.		L			description	EAN	note
		m	m				
HA	white	3	45		folie	8595057651685	without protective foil
HD	white	2	20		carton	8595057651692	with protective foil
SD	light wood	2	20		carton	8595568903105	
TD	dark wood	2	20		carton	8595568903112	



MAT material
 🔥 flaming loop test
 📏 inside area
 ☔ IP protection
 📦 package
🔥 fire reaction class of underlying material
 🔥 self-snuffing
 🌐 leadless material
 🔧 mechanical protection
 🔵 with protective foil
⌄ temperature resistance
 🔧 impact strength
 💣 area with a risk of explosion
 🗑 color