LO 50

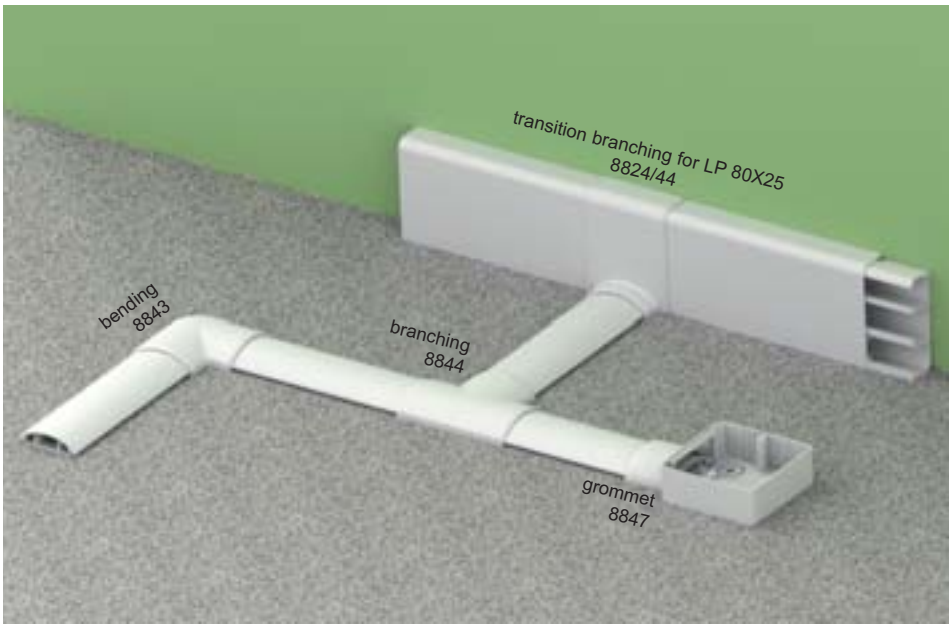

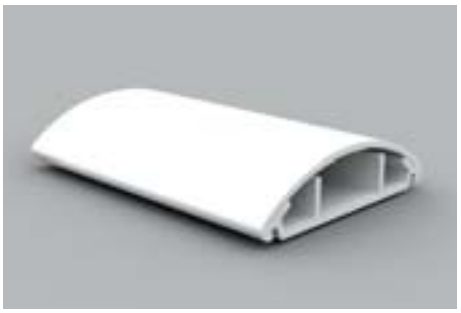

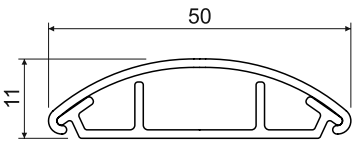

MAT							Pb Free		IK
PVC	-5 - +60°C	850°C	A1 - F	30 sec.	2 J	60; 180; 60 mm²		IP 30	IK07

- Designed for mounting on the floor.
- Designed for load capacity common in apartments and offices.

Accessories			
	conf.	package	EAN
8843 - bending			
	HB	2	8595057654969
	KB	2	8595057656529
	LB	2	8595057662261
8824/44 - transition branching			
	HB	10	8595057634015
	intended for transition to the LP 80X25 trunking		
8844 - branching			
	HB	2	8595057654976
	KB	2	8595057656536
	LB	2	8595057662278
8847 - grommet			
	HB	2	8595057615793
	KB	2	8595057656550
	LB	2	8595057662285
	intended for transition to the LK 80X28 trunking box		

conf.		L			EAN	note
		m	m	description		
HA	white	3	30	folie	8595057615342	
HD	white	2	32	carton	8595057619944	
P2	white	2	32	carton	8595057689190	self-adhesive tape
KD	light grey	2	32	carton	8595057621404	
LD	dark grey	2	32	carton	8595057662216	

material · temperature resistance · self-snuffing · inside area · IP protection · color
fire reaction class of underlying material · flaming loop test · impact strength · leadless material · mechanical protection · package