



PK 140X70 D

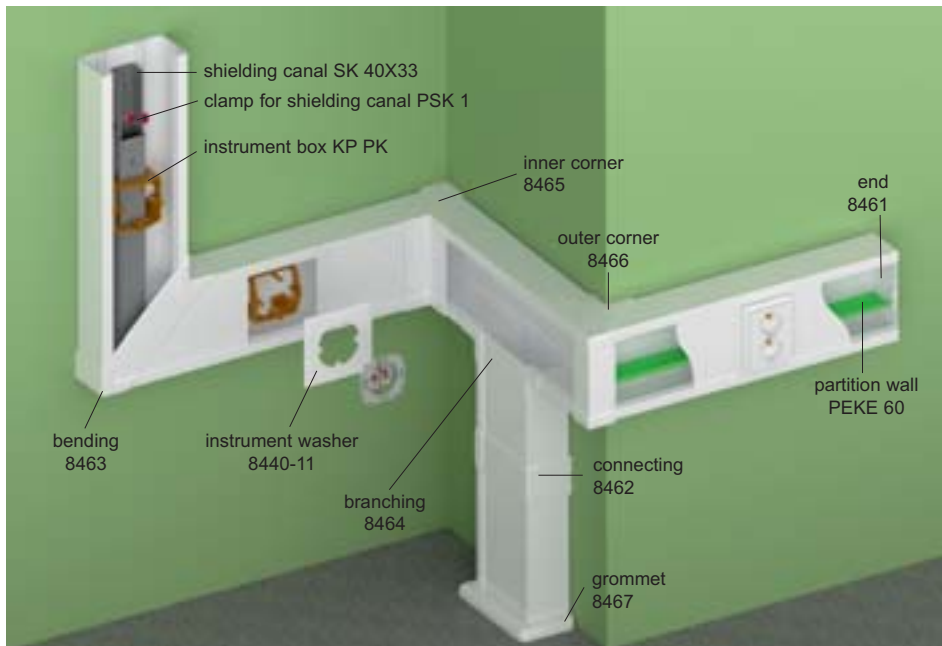

MAT PVC
 -5 - +60°C
 850°C
 A1 - F
 30 sec.
 1 J
 7200 mm²
 Pb Free
 IP 40
 IK 07

- ✓ Designed for inserting power and communication circuits, security lines and other lines.
- ✓ Individual lines can be electromagnetically shielded by inserting a shielding canal, which is fixed to the trunking by clamps PSK 1.
- ✓ For traditional devices, which are installed in instrument box clamped in trunking bottom grooves.

conf.		L			description	EAN	note
		m	m				
HA	white	3	9	folie	8595057632899		
HD	white	2	6	carton	8595057632912		

Accessories			
	conf.	package	EAN
8461 - end			
	HB	2; 10	8595057635135
8462 - connecting			
	HB	2	8595057635142
8463 - bending			
	HB	2	8595057635159
8464 - branching			
	HB	2	8595057635166
8465 - inner corner			
	HB	2	8595057635173
8466 - outer corner			
	HB	2	8595057635180
8467 - grommet			
	HB	2	8595057655171
partition wall			
PEKE 60	-C	20 m	8595057627079
PKS 70/60	XX	20 m	8595057664364
PEP 60	HD	32 m	8595057668768
PEP 60/K	S	24 m	8595057668775
more information on pg. 2-57 - 2-58			
shielding canal			
SK 40X20	S	12 m	8595057614840
SK 40X33	S	12 m	8595057630291
more information on pg. 2-59			
instrument box, instrument carrier			
KP PK	HB	10	8595057629011
PN PK	S	1	8595057662377
more information on pg. 2-62			
instrument washer			
8440-11	HB	10	8595057644052
8440-12	HB	10	8595057644069
8440-13	HB	10	8595057644076
more information on pg. 2-63			

MAT material
 flaming loop test
 inside area
 leadless material
 color

fire reaction class of underlying material
 self-snuffing
 for mounting and double-socket
 IP protection
 package

temperature resistance
 impact strength
 for mounting a wall socket
 mechanical protection