



PK 90X55 D

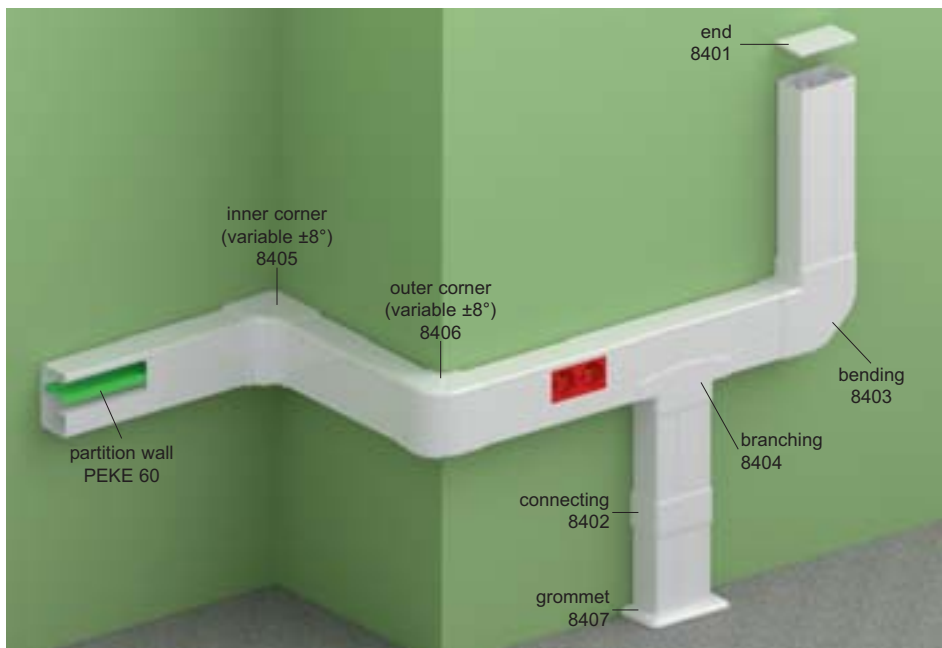

MAT PVC -5 - +60°C 850°C A1 - F 30 sec. 1 J 3800 mm² Pb Free IP 40 IK07

- ✓ Designed for installation of modular devices 45 x 45 or 45 x 22,5 mm.
- ✓ KOPOS recommends installing QUADRO instruments (pg. 2-47), tailor-made for KOPOS products. Third-party devices can also be installed.
- ✓ To separate the circuit, partition wall PEKE 60 can be used. When having to shield data-type circuitry, use partition wall PKS 70/60, which provides similar properties as a metal rail with low weight and easy installation.
- ✓ Maximum number of modular instruments placed next to each other is 3 pcs. When installing multiple instruments next to each, it is necessary to put about 5 cm wide piece of lid after 3 pieces to fasten them.
- ✓ No lids are necessary for the final installation of instrument. The lid is cut to the desired length and inserted next to the instrument.

conf.		L			EAN	note
			m	m		
HD	white	2	12	carton	8595057688056	



Accessories			
	conf.	package	EAN
8401 - end			
	HB	2; 10	8595057688063
8402 - connecting			
	HB	2	8595057688070
8403 - bending			
	HB	2	8595057688087
8404 - branching			
	HB	2	8595057688094
8405 - inner corner (variable ±8°)			
	HB	2	8595057688100
8406 - outer corner (variable ±8°)			
	HB	2	8595057688117
8407 - grommet			
	HB	2	8595057688124
PEKE 60 - partition wall			
	-C	20 m	8595057627079
		more information on pg. 2-57	
PKS 70/60 - partition wall			
	XX	20 m	8595057664364
		more information on pg. 2-57	